




MLase AG

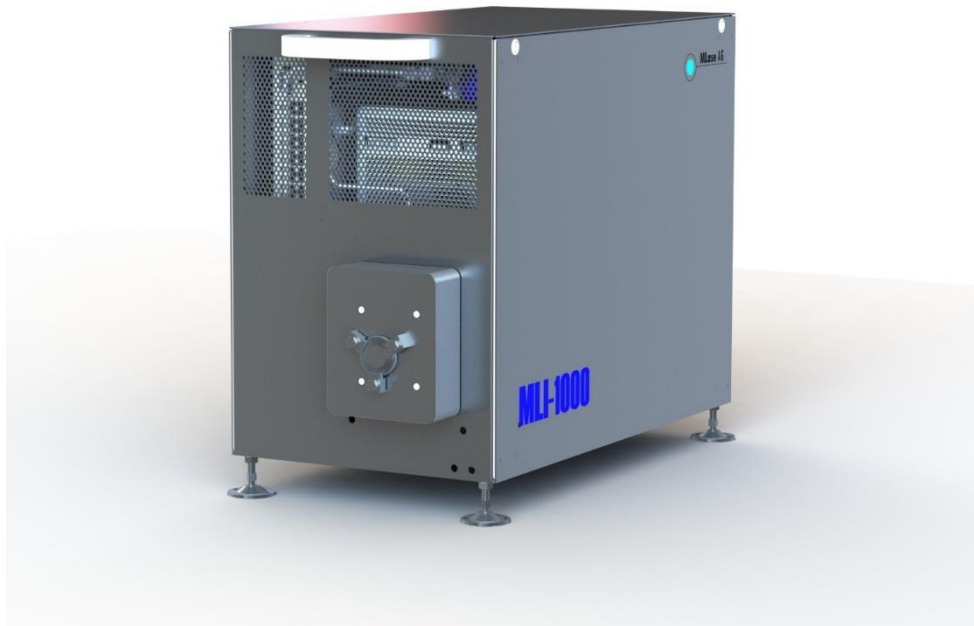

MLI- 200 / 500 / 1000

Key Features

- Rigid Design
- Corona Preionization
- Solid-State circuitry
- Tube Technology
- Energy Monitor
- Compact Excimerlaser, Single Phase

Customer Benefits

- High reliability
- Homogeneous beam profile
- Immediate availability, no aging
- Tube all metal sealed
- Extended lifetimes for many billion pulses
- Energy stabilizing
- Easy to operate, easy to integrate

MLase AG
Industriestrasse 17
82110 Germering
Germany

E-Mail: info@mlase.com
www.mlase.com

Specifications*

Parameter	ArF	ArF	ArF	KrF	KrF	KrF
Wavelength (nm)	193	193	193	248	248	248
Max. Repetition Rate (Hz)	200	500	1000	200	500	1000
Stabilized Pulse Energy (mJ)	6	6	6	10	10	10
Stabilized Pulse Power (W)	1,2	3,0	6,0	2,0	5,0	10
Energy Stability (sigma, %)	2	2	2	2	2	2
Beam Dimensions (FWHM, V x H mm)	6x3	6x3	6x3	6x3	6x3	6x3
Beam Divergence (FWHM, V x H mrad)	2x1	2x1	2x1	2x1	2x1	2x1
Pulse Duration (FWHM) (ns)	5-10	5-10	5-10	5-15	5-15	5-15

*Specifications are subject to change without notice

